



HIGHLIGHTS

- Strobing mode (500 Hz)
- Built-in driver
- Industrial aluminum housing
- High intensity

Model Number	LED Color	Weight	Power Consumption	Input Voltage
BL-AC-010-R	RED	150g	3W	24V
BL-AC-010-G	GREEN	150g	3W	24V
BL-AC-010-B	BLUE	150g	3W	24V
BL-AC-010-W	WHITE	150g	3W	24V




LENGTH : 100 MM

INSTALLATION & WIRING

- 1) Brown: VCC: 24v
- 2) Blue: GND: 0v
- 3) Black: TGR-: Trigger -
- 4) White: TGR+: Trigger +

CONNECTION DIAGRAM

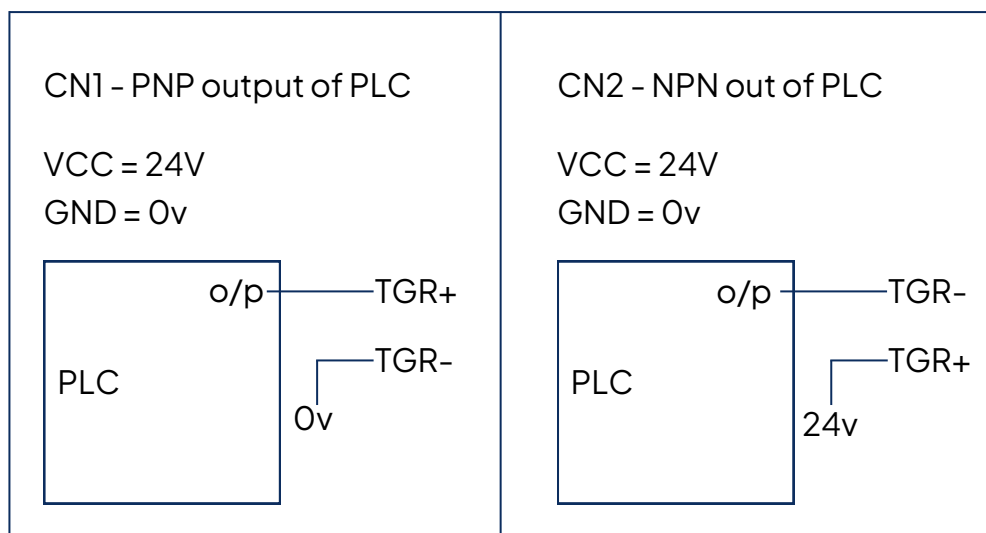

GENERAL PRECAUTIONS

- Avoid fidgeting with the supply wires, as it may cause the internal circuit to fail.
- Cleaning method: use a dry cloth or an air blower to clean the product, or else the diffuser will be scratched.
- Warranty will be void if the product is disassembled.
- 24V DC supply only



HIGHLIGHTS

- Strobing mode (500 Hz)
- Built-in driver
- Industrial aluminum housing
- High intensity

Part Number	LED Color	Weight	Power Consumption	Input Voltage
BL-AC-020-R	RED	250g	6W	24V
BL-AC-020-G	GREEN	250g	6W	24V
BL-AC-020-B	BLUE	250g	6W	24V
BL-AC-020-W	WHITE	250g	6W	24V




LENGTH : 200 MM

INSTALLATION & WIRING

- 1) Brown: VCC: 24v
- 2) Blue: GND: 0v
- 3) Black: TGR-: Trigger -
- 4) White: TGR+: Trigger +

CONNECTION DIAGRAM

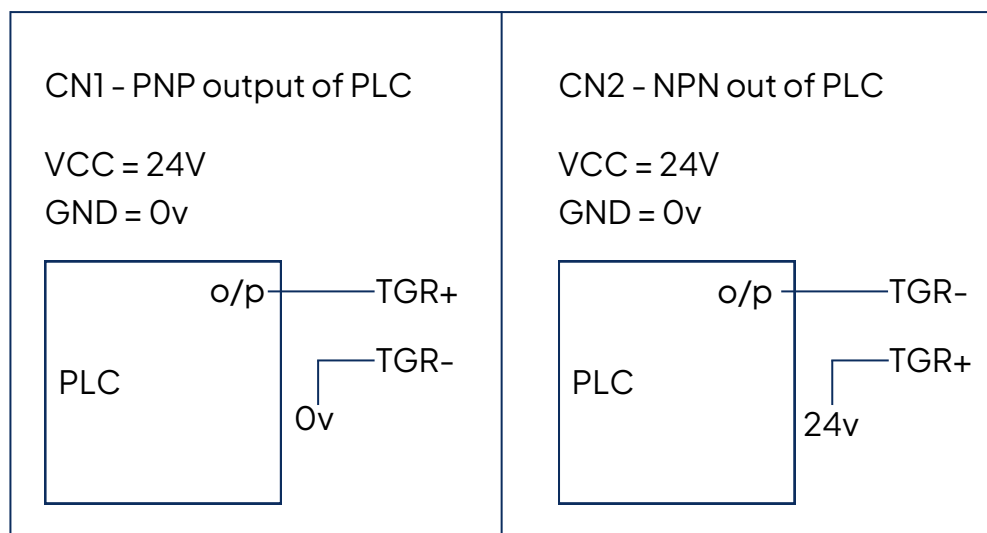

GENERAL PRECAUTIONS

- Avoid fidgeting with the supply wires, as it may cause the internal circuit to fail.
- Cleaning method: use a dry cloth or an air blower to clean the product, or else the diffuser will be scratched.
- Warranty will be void if the product is disassembled.
- 24V DC supply only

HIGHLIGHTS

- Strobing mode (500 Hz)
- Built-in driver
- Industrial aluminum housing
- High intensity

Part Number	LED Color	Weight	Power Consumption	Input Voltage
BL-AC-030-R	RED	450g	9W	24V
BL-AC-030-G	GREEN	450g	9W	24V
BL-AC-030-B	BLUE	450g	9W	24V
BL-AC-030-W	WHITE	450g	9W	24V




LENGTH : 300 MM

INSTALLATION & WIRING

- 1) Brown: VCC: 24v
- 2) Blue: GND: 0v
- 3) Black: TGR-: Trigger -
- 4) White: TGR+: Trigger +

CONNECTION DIAGRAM

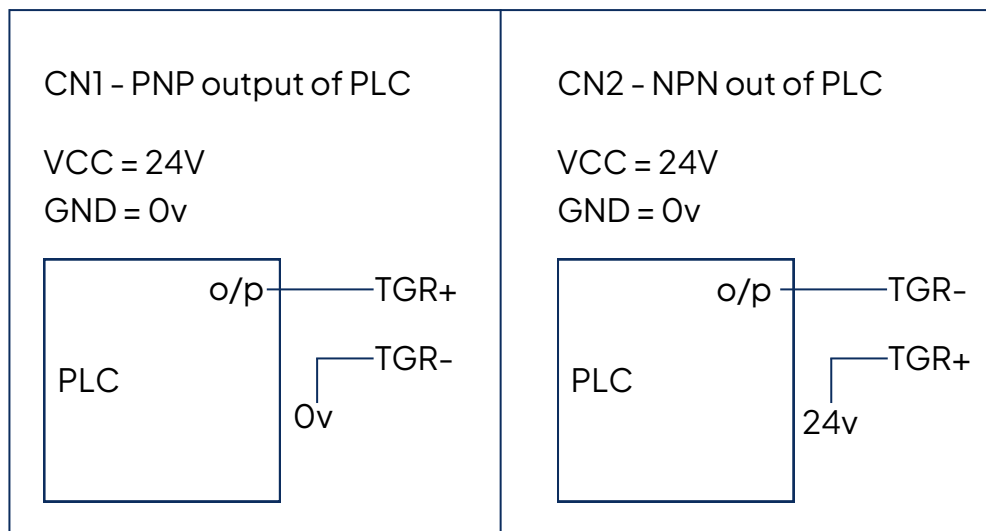

GENERAL PRECAUTIONS

- Avoid fidgeting with the supply wires, as it may cause the internal circuit to fail.
- Cleaning method: use a dry cloth or an air blower to clean the product, or else the diffuser will be scratched.
- Warranty will be void if the product is disassembled.
- 24V DC supply only

HIGHLIGHTS

- Strobing mode (500 Hz)
- Built-in driver
- Industrial aluminum housing
- High intensity

Part Number	LED Color	Weight	Power Consumption	Input Voltage
BL-AC-040-R	RED	600g	12W	24V
BL-AC-040-G	GREEN	600g	12W	24V
BL-AC-040-B	BLUE	600g	12W	24V
BL-AC-040-W	WHITE	600g	12W	24V




LENGTH : 400 MM

INSTALLATION & WIRING

- 1) Brown: VCC: 24v
- 2) Blue: GND: 0v
- 3) Black: TGR-: Trigger -
- 4) White: TGR+: Trigger +

CONNECTION DIAGRAM

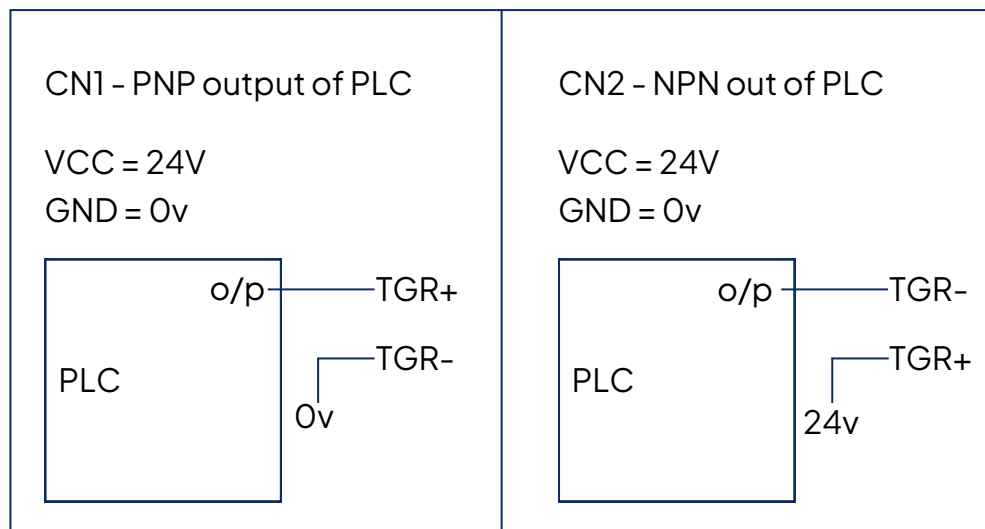

GENERAL PRECAUTIONS

- Avoid fidgeting with the supply wires, as it may cause the internal circuit to fail.
- Cleaning method: use a dry cloth or an air blower to clean the product, or else the diffuser will be scratched.
- Warranty will be void if the product is disassembled.
- 24V DC supply only


HIGHLIGHTS

- Strobing mode (500 Hz)
- Built-in driver
- Industrial aluminum housing
- High intensity

Part Number	LED Color	Weight	Power Consumption	Input Voltage
BL-AC-050-R	RED	850g	15W	24V
BL-AC-050-G	GREEN	850g	15W	24V
BL-AC-050-B	BLUE	850g	15W	24V
BL-AC-050-W	WHITE	850g	15W	24V

**LENGTH : 500 MM****INSTALLATION & WIRING**

- 1) Brown: VCC: 24v
- 2) Blue: GND: 0v
- 3) Black: TGR-: Trigger -
- 4) White: TGR+: Trigger +

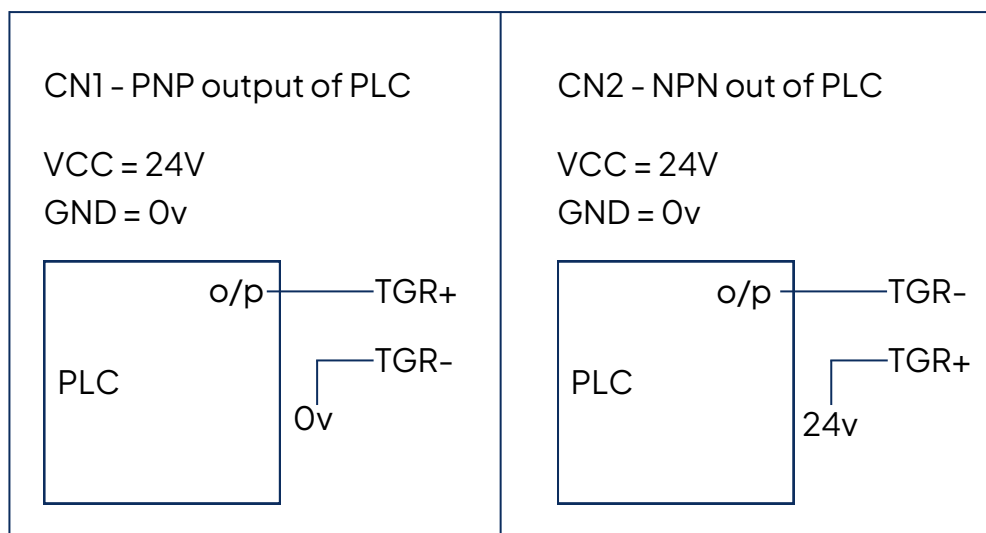CONNECTION DIAGRAM**GENERAL PRECAUTIONS**

- Avoid fidgeting with the supply wires, as it may cause the internal circuit to fail.
- Cleaning method: use a dry cloth or an air blower to clean the product, or else the diffuser will be scratched.
- Warranty will be void if the product is disassembled.
- 24V DC supply only